

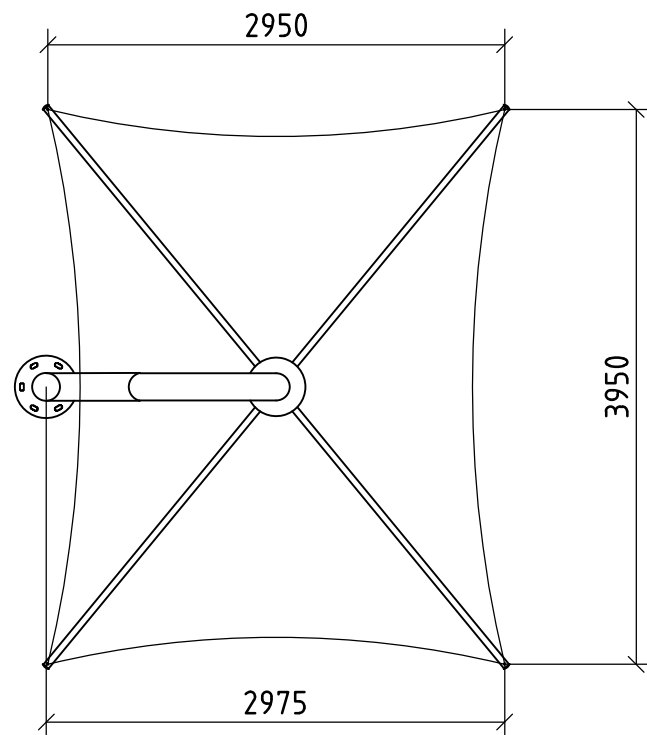
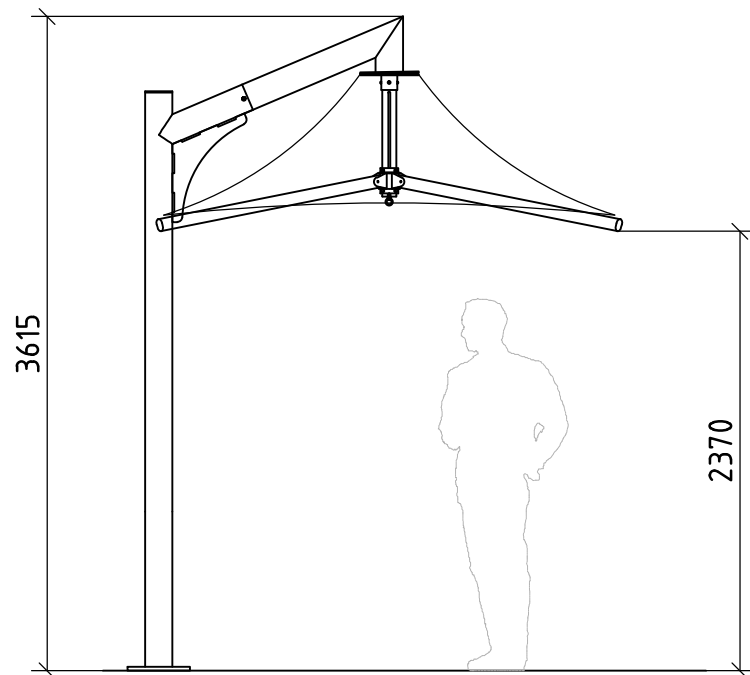


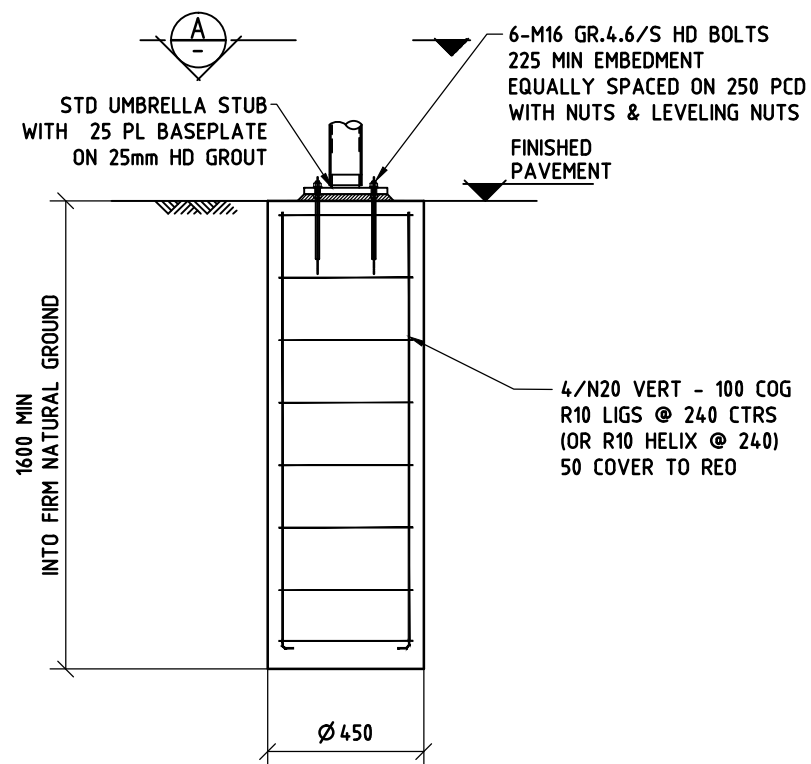


PLAN

ELEVATION

FOOTING OPTION A - BORED PIER

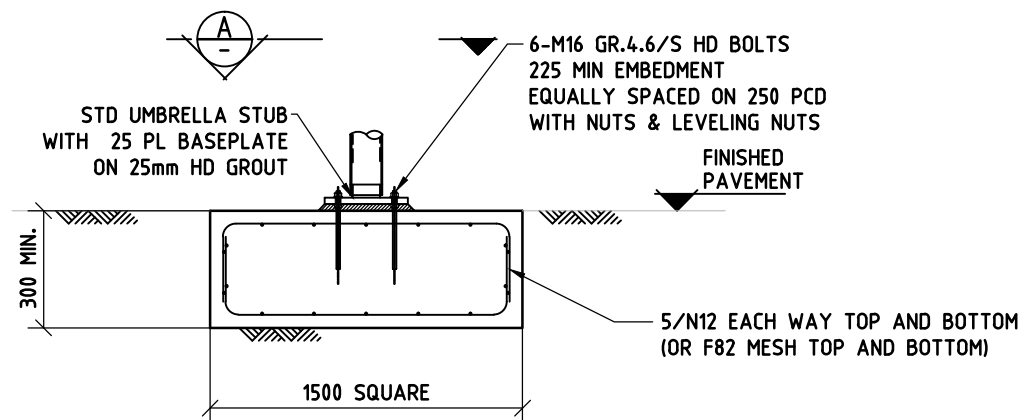


FOOTING OPTION B - PAD FOOTING

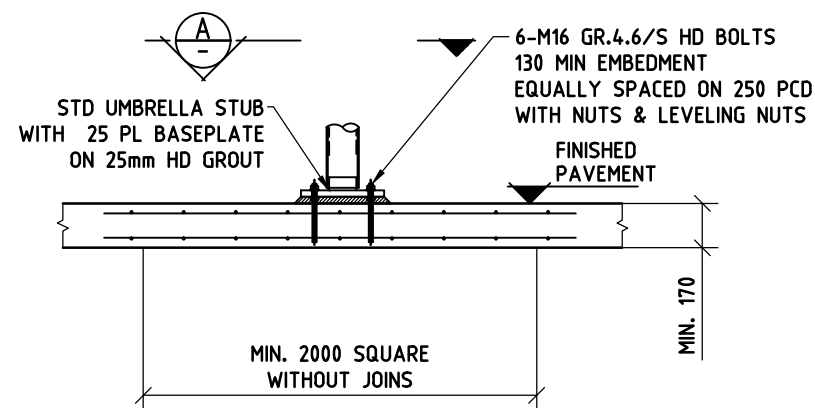


FOOTING OPTION C - EXISTING SLAB

NOTES

- 1: THIS FOOTING DETAIL IS SUITABLE FOR FOUNDING IN NATURAL UNDISTURBED MATERIAL WITH A MINIMUM ALLOWABLE BEARING CAPACITY OF 100kPa.
- 2: IF FOOTING IS IN FILL MATERIAL PLEASE REFER TO SKYSPAN UMBRELLA FOR SITE SPECIFIC FOOTING DESIGN.
- 3: THIS FIXING DETAIL IS APPLICABLE FOR CANTILEVER UMBRELLAS.
- 4: ALL WORKMANSHIP AND MATERIALS TO BE IN ACCORDANCE WITH AS3600.
- 5: EXCAVATIONS TO BE CLEAN AND FREE FROM LOOSE MATERIAL.
6. CONCRETE $f'c = 25\text{MPa}$.
7. MAXIMUM AGGREGATE SIZE TO BE 20mm.
8. CONCRETE SHOULD BE VIBRATED AFTER POURING, AND KEPT DAMP FOR AT LEAST 7 DAYS TO ASSIST CURING.

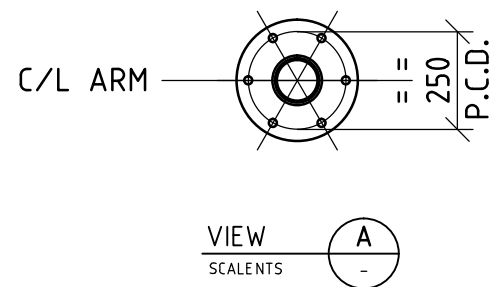

NOTE: DETAIL TO SUIT FIXED BASE UMBRELLA ONLY
FOR PIVOT BASED UMBRELLA SEE DWG V43R-1002

 1/4 Old Pacific Hwy, Yatala, Queensland 4207, Australia Tel : +61 (0) 7 3804 6288 Fax: +61 (0) 7 3287 3999 Email: info@skyspanshade.com.au www.skyspanshade.com.au	D	COLOUMN MOVED CLOSER TO FABRIC	GM	19.03.19	Project Name 4 x 3m RECTANGULAR FIXED VISTA UMBRELLA	Title GENERAL ARRANGEMENT WITH FOOTING DETAILS	This document is copyright and remains the property of Skyspan Shade Pty. Ltd It must not be used or copied without the written consent of Skyspan Shade Pty. Ltd.			
	C	BASEPLATE ORIENTATION AMMENDED	GM	08.04.15						
	B	ALTERNATIVE HD DETAILS REMOVED	GM	20.03.14			Date: FEB 14	Drawn: EK	Checked: GM	Scale: A3: NTS
	A	FOR CONSTRUCTION	EK	25.02.14			Drawing No. V43S-1001		Revision D	
	REVISIONS									