Figured dimensions take precedence - DO NOT SCALE.

WIND RATED TO W41

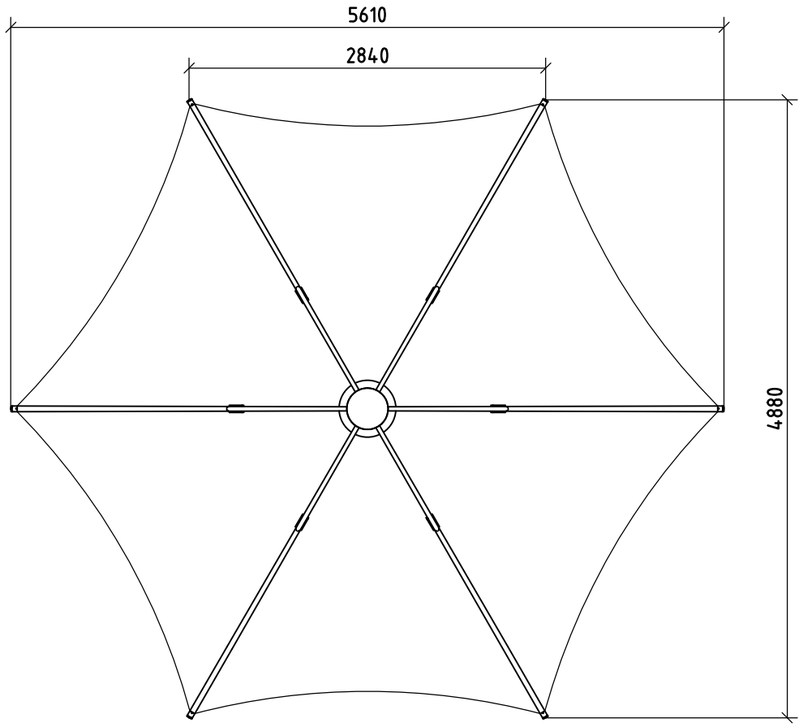

PLAN

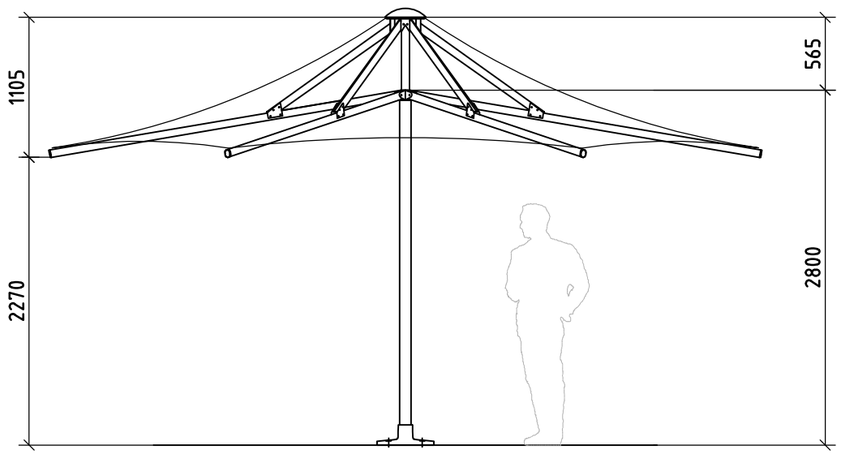

ELEVATION

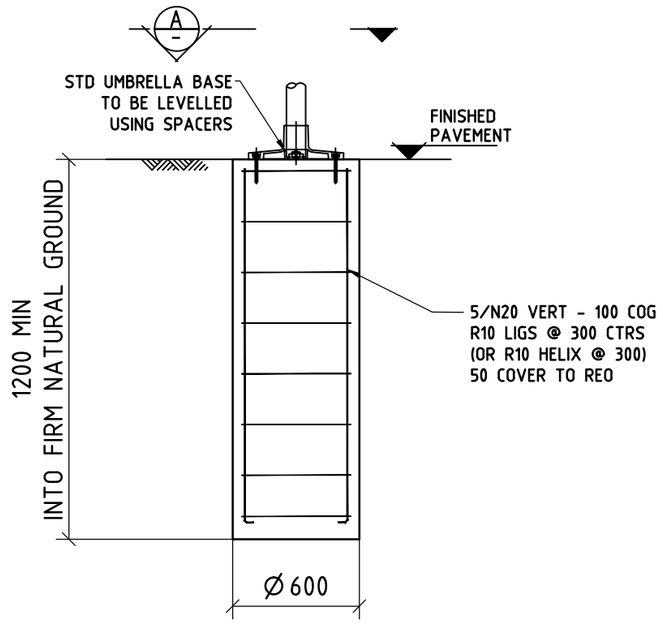

FOOTING OPTION A - BORED PIER

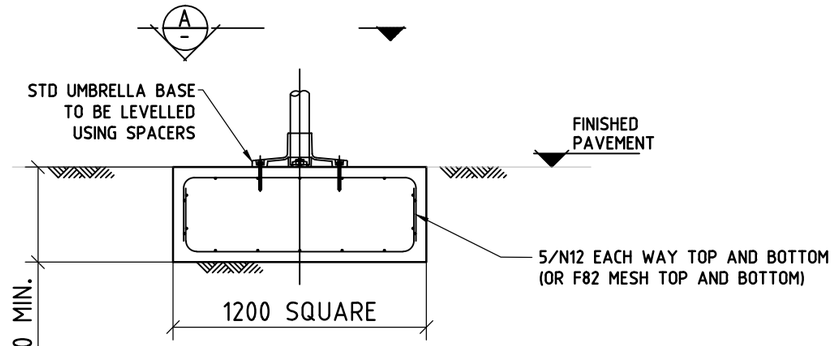

FOOTING OPTION B - PAD FOOTING

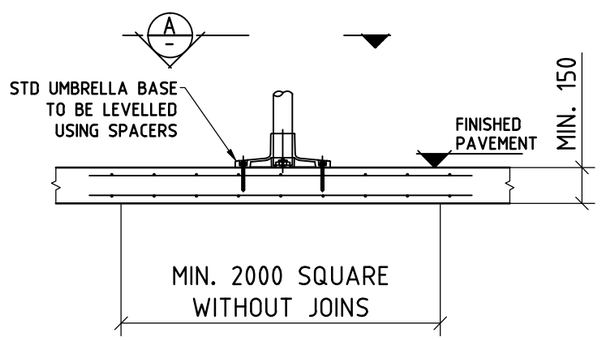

FOOTING OPTION C - EXISTING SLAB

NOTES

1: THIS FOOTING DETAIL IS SUITABLE FOR FOUNDING IN NATURAL UNDISTURBED MATERIAL WITH A MINIMUM ALLOWABLE BEARING CAPACITY OF 100kPa.
2: IF FOOTING IS IN FILL MATERIAL PLEASE REFER TO SKYSPAN UMBRELLA FOR SITE SPECIFIC FOOTING DESIGN.
3: THIS FIXING DETAIL IS NOT APPLICABLE FOR CANTILEVER UMBRELLAS.
4: ALL WORKMANSHIP AND MATERIALS TO BE IN ACCORDANCE WITH AS3600.
5: EXCAVATIONS TO BE CLEAN AND FREE FROM LOOSE MATERIAL.
6. CONCRETE f'c = 25MPa.
7. MAXIMUM AGGREGATE SIZE TO BE 20mm.
8. CONCRETE SHOULD BE VIBRATED AFTER POURING, AND KEPT DAMP FOR AT LEAST 7 DAYS TO ASSIST CURING.

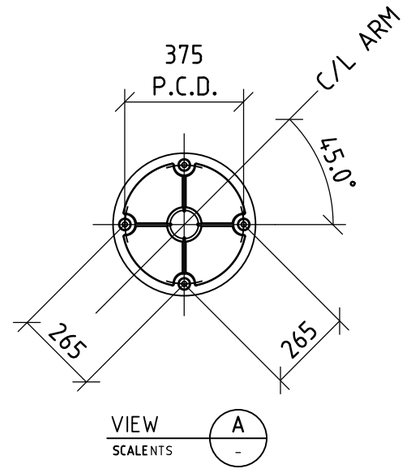

TYPICAL H.D. BOLT DETAILS

4/M12 Gr4.6 GALV. H.D. BOLTS 110 MIN EMBEDMENT 100 MIN EDGE DISTANCE USE RAMSET 101 RESIN OR EQUIV.

OR

POWERS EXCALIBUR SCREWBOLT - MIN 90 EMBEDMENT 100 MIN EDGE DISTANCE

OR

THREADED INSERT ANCHORS WITH M12 SOCKET HEAD CAP SCREWS
BOLT HEAD TO BE FLUSH WITH SLAB WHEN UMBRELLA REMOVED

ALL FIXINGS TO BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS

SKYSPAN™
1/4 Old Pacific Hwy, Yatala,
Queensland 4207, Australia
Tel : +61 (0) 7 3804 6288 Fax: +61 (0) 7 3287 3999
Email: info@skyspanshade.com.au
www.skyspanshade.com.au

A	FOR CONSTRUCTION	GM	06.02.14

REVISIONS

Project Name
5.6m HEXAGONAL TYPHOON UMBRELLA

Title
GENERAL ARRANGEMENT WITH FOOTING DETAILS

This document is copyright and remains the property of Skyspan Shade Pty. Ltd It must not be used or copied without the written consent of Skyspan Shade Pty. Ltd.

Date: FEB 14	Drawn: GM	Checked: CM	Scale@A3: NTS

Drawing No.
T56H–1001

Revision
A