

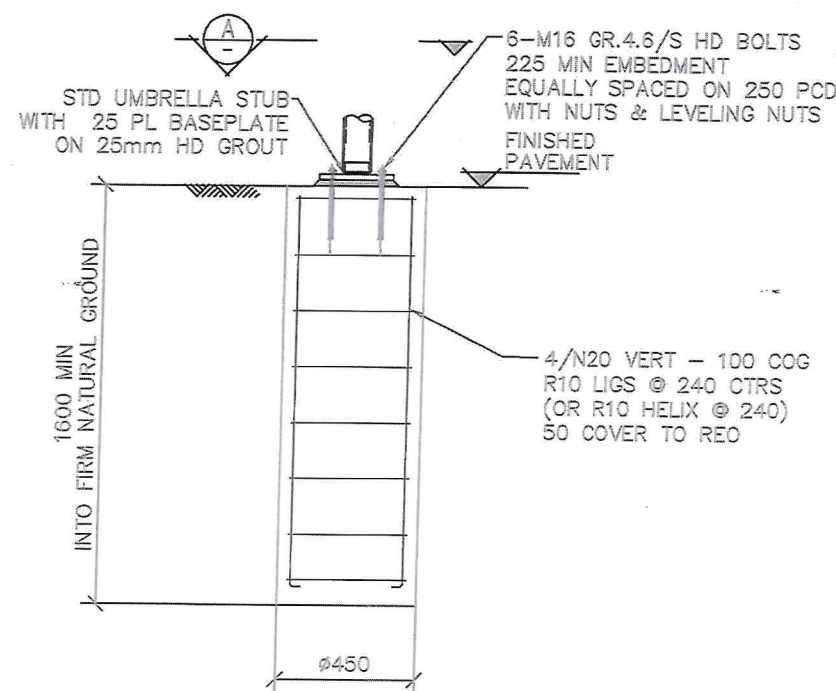
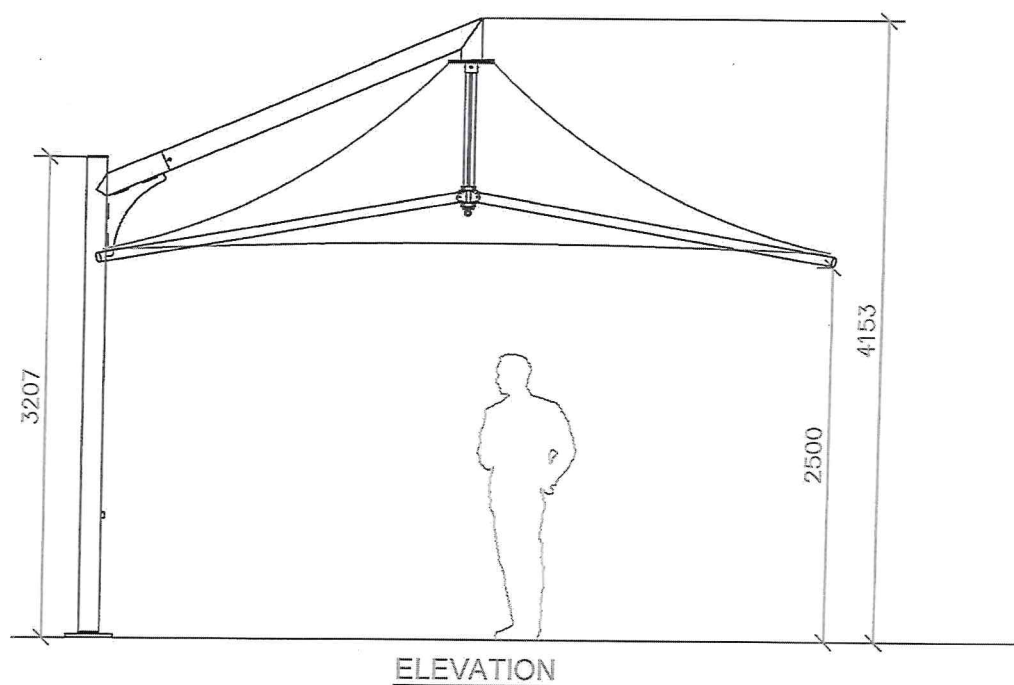


Figured dimensions take precedence - DO NOT SCALE.


WIND RATED TO W33

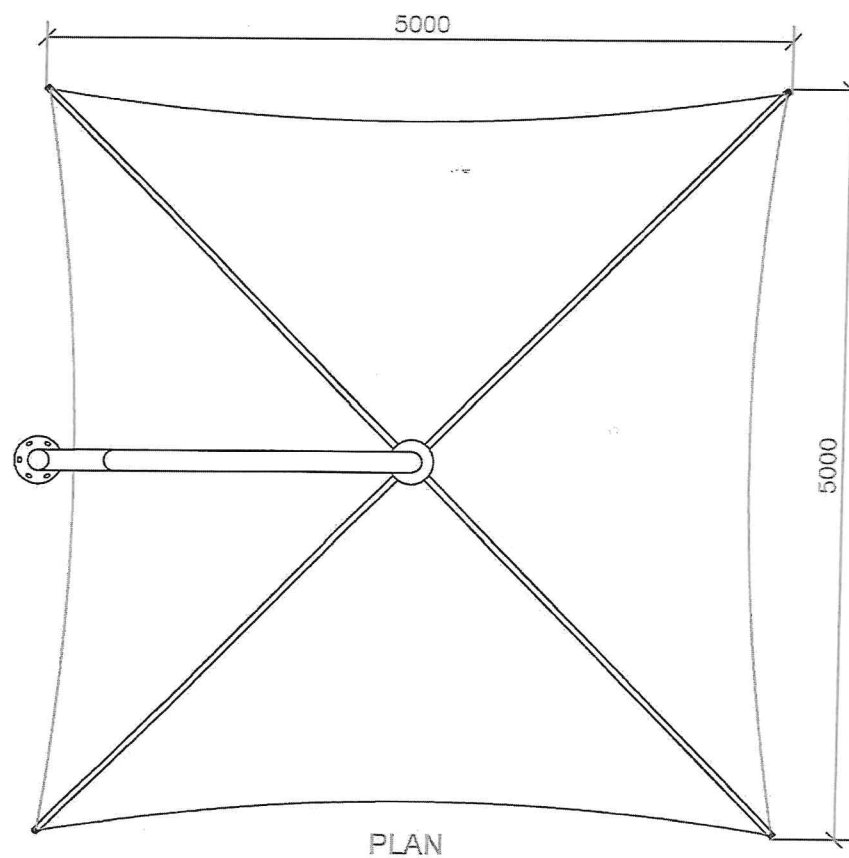

FOOTING OPTION A - BORED PIER

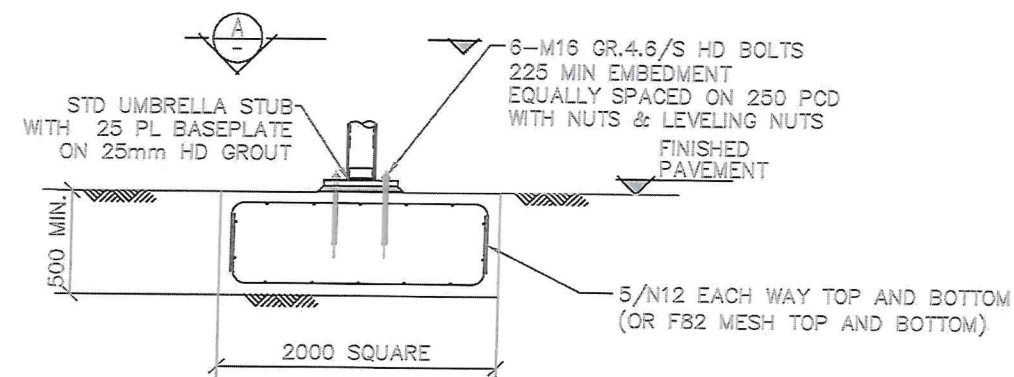


FOOTING OPTION B - PAD FOOTING

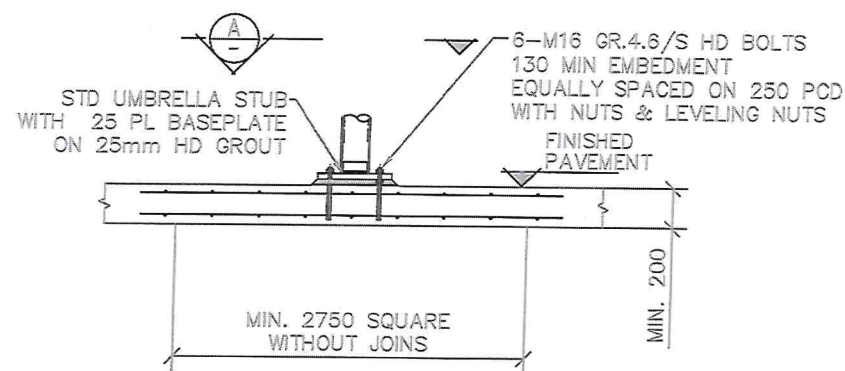

FOOTING OPTION C - EXISTING SLAB

NOTES

- 1: THIS FOOTING DETAIL IS SUITABLE FOR FOUNDING IN NATURAL UNDISTURBED MATERIAL WITH A MINIMUM ALLOWABLE BEARING CAPACITY OF 100kPa.
- 2: IF FOOTING IS IN FILL MATERIAL PLEASE REFER TO SKYSPAN UMBRELLA FOR SITE SPECIFIC FOOTING DESIGN.
- 3: THIS FIXING DETAIL IS APPLICABLE FOR CANTILEVER UMBRELLAS.
- 4: ALL WORKMANSHIP AND MATERIALS TO BE IN ACCORDANCE WITH AS3600.
- 5: EXCAVATIONS TO BE CLEAN AND FREE FROM LOOSE MATERIAL.
6. CONCRETE $f'_c = 25\text{MPa}$.
7. MAXIMUM AGGREGATE SIZE TO BE 20mm.
8. CONCRETE SHOULD BE VIBRATED AFTER POURING, AND KEPT DAMP FOR AT LEAST 7 DAYS TO ASSIST CURING.



1/4 Old Pacific Hwy, Yatala,
Queensland 4207, Australia
+61 (0) 7 3804 6288 Fax: +61 (0) 7 3287 3999
Email: info@skyspanshade.com.au
www.skyspanshade.com.au

FOR CONSTRUCTION

REVISIONS

EK 25.02.14

Project Name

5.0m SQUARE VISITOR GENERAL ARRANGEMENT
PIVOT BASE UMBRELLA WITH FOOTING DETAILS

Title

This document is copyright and remains the property of Skyspan Shade Pty. Ltd. It must not be used or copied without the written consent of Skyspan Shade Pty. Ltd.

Date: FEB 17 Drawn: EK Checked: GM Scale: A:NTS

Drawing No.

V50SP-1001

Revision

A