Figured dimensions take precedence - DO NOT SCALE.

WIND RATED TO W33

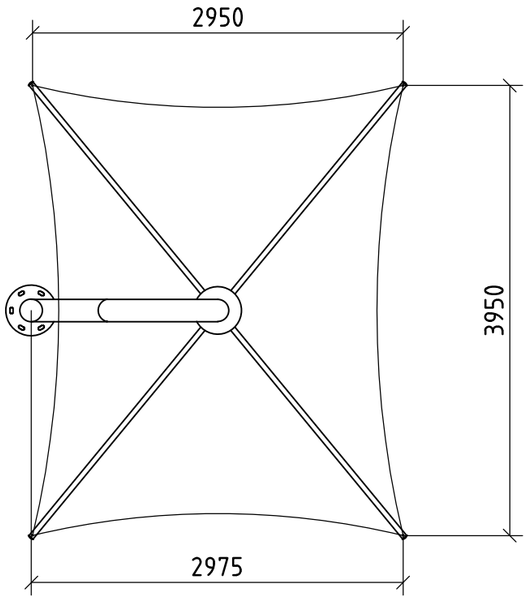

PLAN

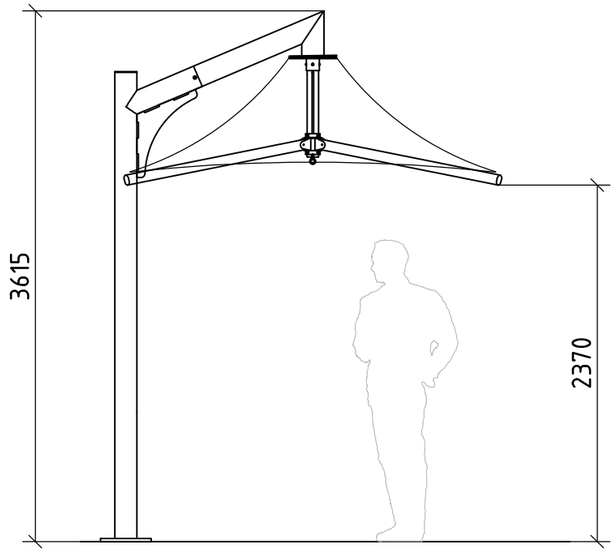

ELEVATION

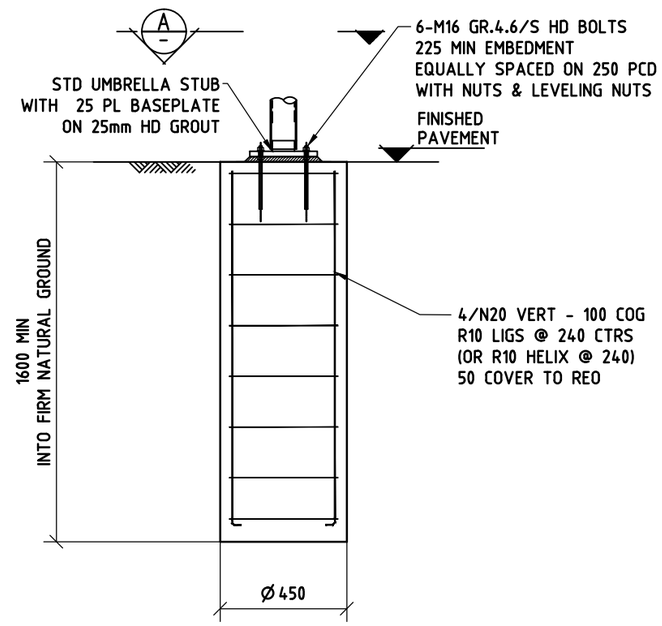

FOOTING OPTION A - BORED PIER

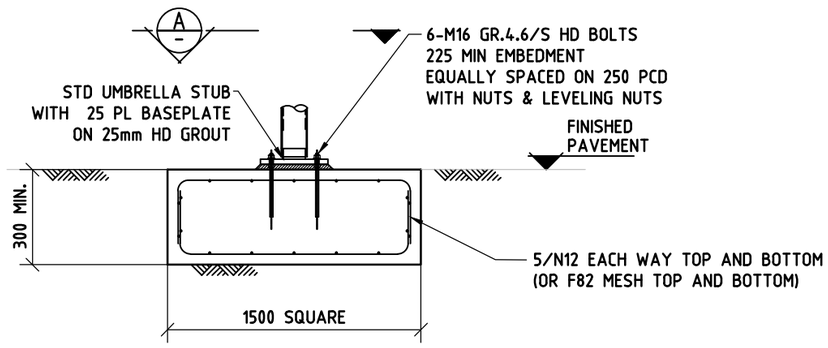

FOOTING OPTION B - PAD FOOTING

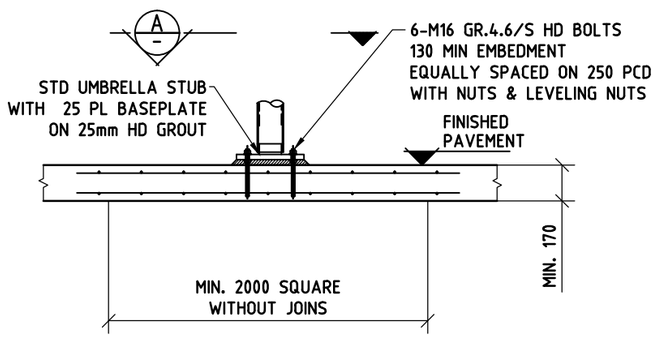

FOOTING OPTION C - EXISTING SLAB

NOTES

1: THIS FOOTING DETAIL IS SUITABLE FOR FOUNDING IN NATURAL UNDISTURBED MATERIAL WITH A MINIMUM ALLOWABLE BEARING CAPACITY OF 100kPa.
2: IF FOOTING IS IN FILL MATERIAL PLEASE REFER TO SKYSPAN UMBRELLA FOR SITE SPECIFIC FOOTING DESIGN.
3: THIS FIXING DETAIL IS APPLICABLE FOR CANTILEVER UMBRELLAS.
4: ALL WORKMANSHIP AND MATERIALS TO BE IN ACCORDANCE WITH AS3600.
5: EXCAVATIONS TO BE CLEAN AND FREE FROM LOOSE MATERIAL.
6. CONCRETE f'c = 25MPa.
7. MAXIMUM AGGREGATE SIZE TO BE 20mm.
8. CONCRETE SHOULD BE VIBRATED AFTER POURING, AND KEPT DAMP FOR AT LEAST 7 DAYS TO ASSIST CURING.



VIEW A
SCALE NTS

SKYSPAN™
1/4 Old Pacific Hwy, Yatala,
Queensland 4207, Australia
Tel : +61 (0) 7 3804 6288 Fax: +61 (0) 7 3287 3999
Email: info@skyspanshade.com.au
www.skyspanshade.com.au

D	COLOUMN MOVED CLOSER TO FABRIC	GM	19.03.19
C	BASEPLATE ORIENTATION AMMENDED	GM	08.04.15
B	ALTERNATIVE HD DETAILS REMOVED	GM	20.03.14
A	FOR CONSTRUCTION	EK	25.02.14

REVISIONS

Project Name
4 x 3m RECTANGULAR PIVOT BASE VISTA UMBRELLA

Title
GENERAL ARRANGEMENT WITH FOOTING DETAILS

This document is copyright and remains the property of Skyspan Shade Pty. Ltd It must not be used or copied without the written consent of Skyspan Shade Pty. Ltd.

Date:	Drawn:	Checked:	Scale@A3:
FEB 14	EK	GM	NTS

Drawing No.
V43S-1002

Revision
D