WIND RATED TO W33

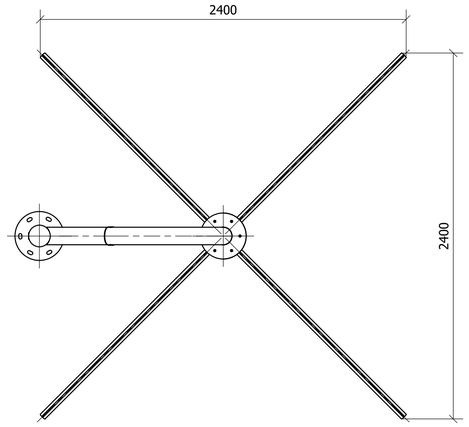

PLAN VIEW
SCALE 1:20

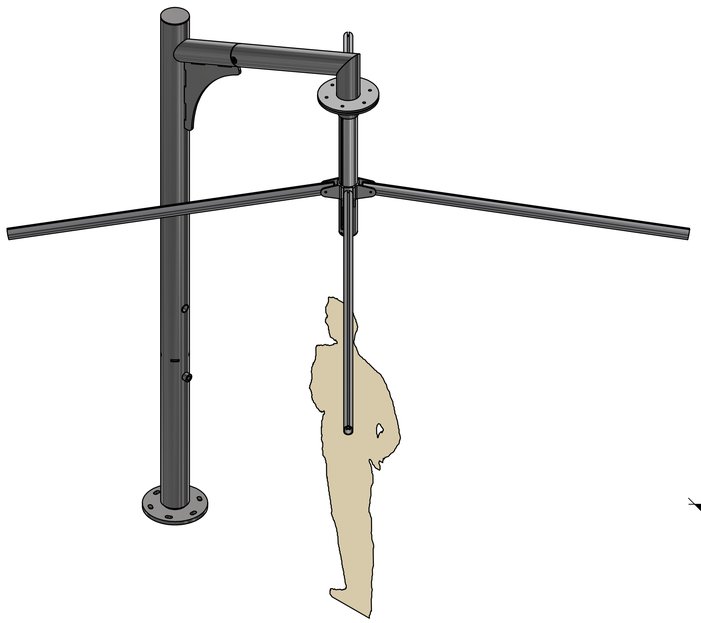

AXONOMETRIC VIEW
SCALE N.T.S

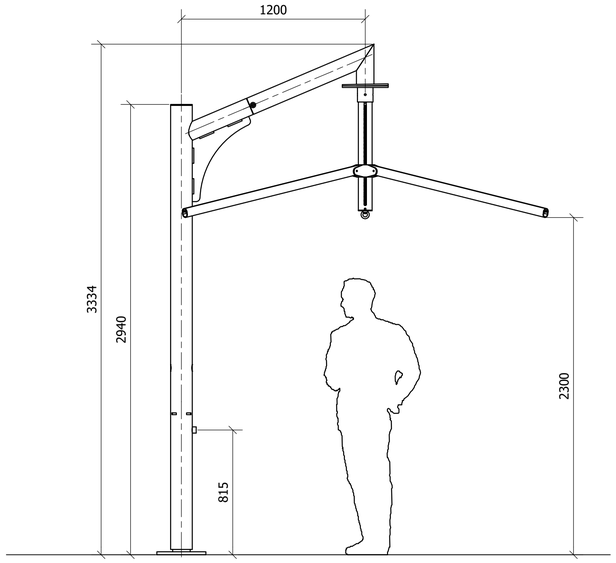

ELEVATION
SCALE 1:20

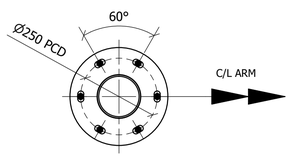

SECTION A
SCALE 1:10

A -

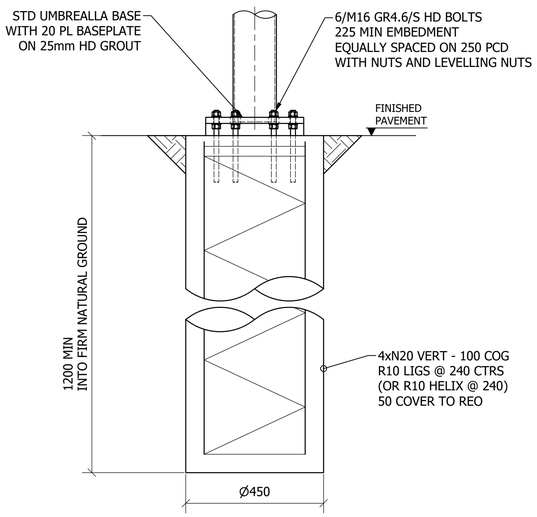

FOOTING OPTION A - BORED PIER

A -

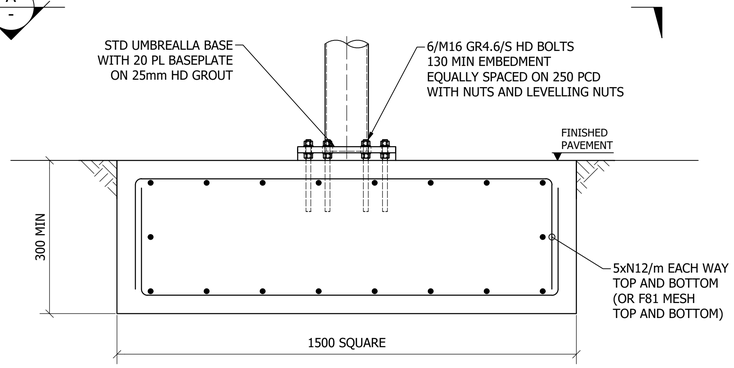

FOOTING OPTION B - PAD FOOTING

A -

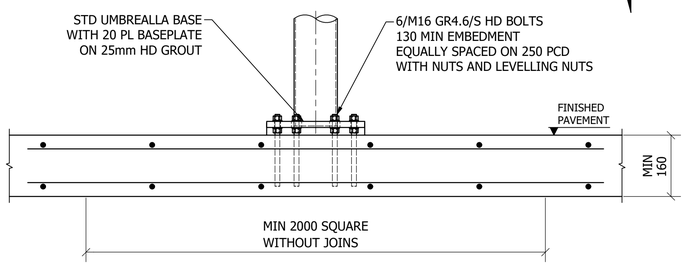

FOOTING OPTION C - EXISTING SLAB

GENERAL NOTES.

1. THIS FOOTING DETAIL IS SUITABLE FOR FOUNDING IN NATURAL UNDISTURBED MATERIAL WITH A MINIMUM ALLOWABLE BEARING CAPACITY OF 100kPa
2. IF FOOTING IS IN FILL MATERIAL PLEASE REFER TO SKYSPAN UMBRELLA FOR SITE SPECIFIC FOOTING DESIGN
3. THIS FIXING DETAIL IS APPLICABLE FOR CANTILEVER UMBRELLAS.
4. ALL WORKMANSHIP AND MATERIALS TO BE IN ACCORDANCE WITH AS3600.
5. EXCAVATIONS TO BE CLEAN AND FREE FROM LOOSE MATERIAL.
6. CONCRETE f'c = 25MPa.
7. MAXIMUM AGGREGATE SIZE TO BE 20mm.
8. CONCRETE SHOULD BE VIBRATED AFTER POURING, AND KEPT DAMP FOR AT LEAST 7 DAYS TO ASSIST CURING.

REV	DATE	DESCRIPTION	BY	CHK
A	07.03.24	FOR CONSTRUCTION	R.H	G.M

REVISION HISTORY

SKYSPANSHADE

1/4 Old Pacific Hwy, Yatla
Queensland 4207, Australia
tel: +61 (0) 7 3804 6288 Fax: +61 (0) 7 3287 3999
Email: info@skyspanshade.com.au
www.skyspanshade.com.au

Figured dimensions take precedence - DO NOT SCALE.
All drawings and details are copyright and remain the property of Skyspan Shade Pty. Ltd. The design and specification must not be copied or shown to authorized persons without the consent of Skyspan Shade Pty. Ltd.

Title.
GENERAL ARRANGEMENT WITH FOOTING DETAILS

Project Name.
2.4m SQUARE PIVOT BASE VISTA UMBRELLA

Client.
SKYSPAN

Project number.
VS24 - PIVOT

Drawn	Scale @ A1	EST MASS
C.H	AS SHOWN	-
Designed by	Checked by	Approved by
G.M	A.B	A.B

Drawing no. V24SP-1001 | Sheet 1 of 1 | Revision A

(7/03/2024)